




JAE-G5 EXTENDED ARCA RAIL

- 1 Remove the three bolts from the underside of the existing JAE-G5 ARCA rail.
- 2 Detach the current rail and align the extended ARCA rail with the bolt holes.
- 3 Using a 3/32" hex key, tighten all bolts until snug.
- 4 Torque each screw to 13 in-lbs max.

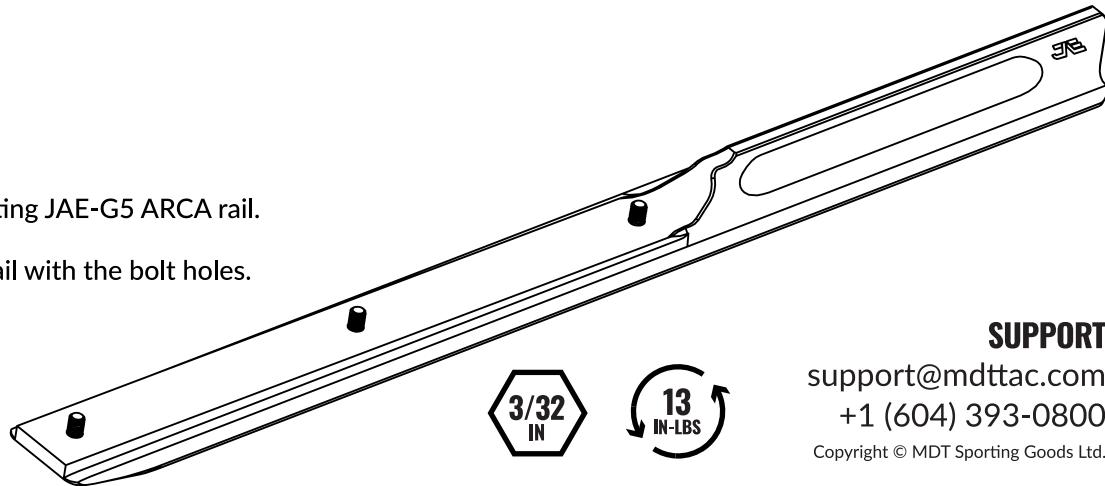

SUPPORT

support@mdttac.com
+1 (604) 393-0800

Copyright © MDT Sporting Goods Ltd.